

# MARVELL® 88SS1321 SSD Controller

PCIe Gen 4x4, 4-Channel High-Performance SSD Controller with NVMe 1.3c Interface

## PRODUCT OVERVIEW


The Marvell® 88SS1321 enables high performance and high capacity SSDs for use in small form factor applications; for example, cloud data center compute server storage, enterprise boot drives, PC client storage and gaming storage as well as emerging industrial and edge device applications.

Leveraging a tri-core Arm® Cortex® R5 architecture that supports both DRAM and DRAMless operations, the product is ideally suited for m.2 2242, 2280 SSDs in single & double-sided and m.2230 in double-sided form factor. The Marvell 88SS1321 controller supports PCIe Gen 4 and four ONFI and TOGGLE NAND channels operating at up to 1200MT/s that enable high capacity, high throughput and low latency storage over a wide range of use cases. The common hardware and firmware controller architecture in 12nm process technology provides the best-in-class electrical and thermal characteristics and ultra-low power consumption.

The 88SS1321 leverages the 4th generation of the Marvell NANDEdge™ LDPC engine for extracting the highest level of error correction capability and low-latency read retries and endurance to support next generation TLC and QLC memories.

The SSD controller also supports TCG standards including an AES engine and OTP storage for secure drive configuration.

## BLOCK DIAGRAM

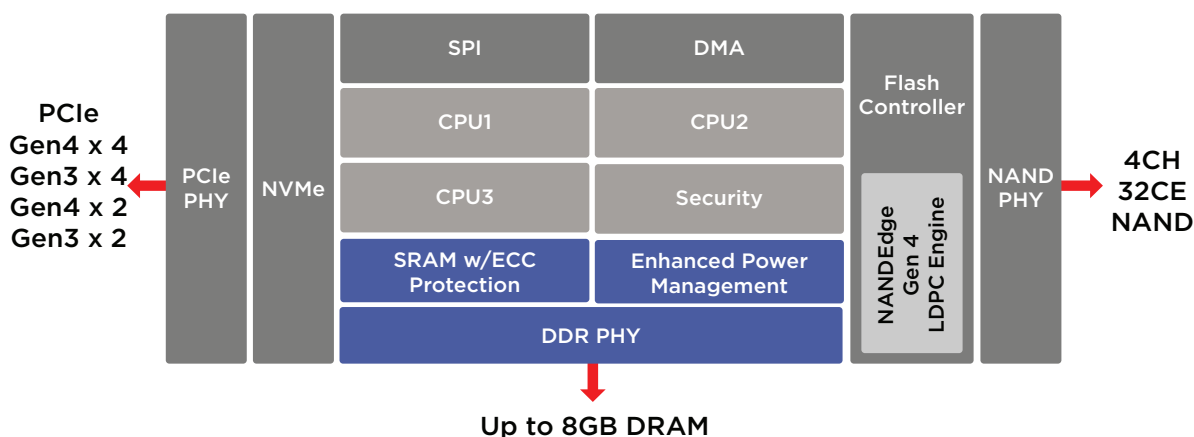

Marvell 88SS1321 SSD Controller

## KEY FEATURES AND BENEFITS

FEATURES	BENEFITS
Processor	<ul style="list-style-type: none"> <li>• Tri-Cortex R5 CPUs</li> </ul>
Interface	<ul style="list-style-type: none"> <li>• PCIe Gen 4x4; Gen 4x2; Gen 3x4 and Gen 3x2</li> <li>• 6G SATA</li> </ul>
DDR Controller	<ul style="list-style-type: none"> <li>• Upto 8GB DDR4, LPDDR3, LPDDR4(x)</li> <li>• 32-bit data bus width</li> <li>• 2 chip enable pins</li> </ul>
Flash Controller	<ul style="list-style-type: none"> <li>• 4 Channels @ 1200MT/s</li> <li>• Up to 32 CEs (4CH x 8 CE/Channel)</li> <li>• Compatible with ONFI 2.2/2.3/3.0/4.0/4.1, JEDEC mode and Toggle 1.0/2.0/3.0/4.0</li> <li>• Hardware RAID</li> <li>• 4th generation of Marvell NANDEdge™ LDPC engine</li> </ul>
NVMe	<ul style="list-style-type: none"> <li>• NVMe Standard Revision 1.3c compliance</li> <li>• Supports Host Memory Buffer (HMB) Option</li> </ul>
Data Protection & Security	<ul style="list-style-type: none"> <li>• End-to-end data protection</li> <li>• OTP support for secure drive configuration</li> <li>• AES encryption hardware</li> </ul>
Temperature Support	<ul style="list-style-type: none"> <li>• 0C to 70C (C-temp)</li> <li>• -40C to 85C (I-temp)</li> <li>• On-Die Temperature Sensor</li> </ul>
Performance	<ul style="list-style-type: none"> <li>• 128KB Sequential Read up to 3.9 GB/s</li> <li>• 128KB Sequential Write up to 3.3 GB/s</li> <li>• 4K Random Read up to 690 K IOPS</li> <li>• 4K Random Write up to 500K IOPS</li> </ul>
Deep Sleep Idle Power	<ul style="list-style-type: none"> <li>• PS4 (L1.2): -1mW</li> </ul>
Package	<ul style="list-style-type: none"> <li>• 12mm x 13.5mm (356 ball) FC-TFBGA package</li> </ul>

## TARGET APPLICATIONS

- PC Client
- Gaming
- Industrial
- Data Center
- Enterprise Boot-Drive High-performance SSDs

