

Datasheet

SATADOM-ML 3MG2-P series

- Built-in Pin 8 power supply
- Best boot drive solution for server and embedded system
- SATA 6Gb/s interface
- High IOPS to reduce boot up timing
- Innovative Firmware Algorithm
- Anti-vibration mechanical design
- Built in iData Guard
- Hardware write protection supported



Introduction

Innodisk Serial ATA Disk on Module (SATADOM) supports SATA III standard (6.0Gb/s) interface with excellent performance, and SATADOM-ML 3MG2-P is designed as the smallest form factor size that could enhance compatibility with various design applications.

The innovative Pin8 uses the SATA connector itself as a power supply to drive the device without external cables. It could be connected directly to the SATA on-board socket on customers' system without additional power cable. Besides, the booting time for operation and the power consumption is less than hard disk drive (HDD), and can work under harsh environment compile with ATA protocol, no additional drives are required, and the SSD can be configured as a boot device or data storage device.


SATADOM-ML

3MG2-P series

Contact us for more information about the SATADOM-ML 3MG2-P.

Innodisk is a service-driven provider of industrial embedded flash storage and Dram products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Diagram

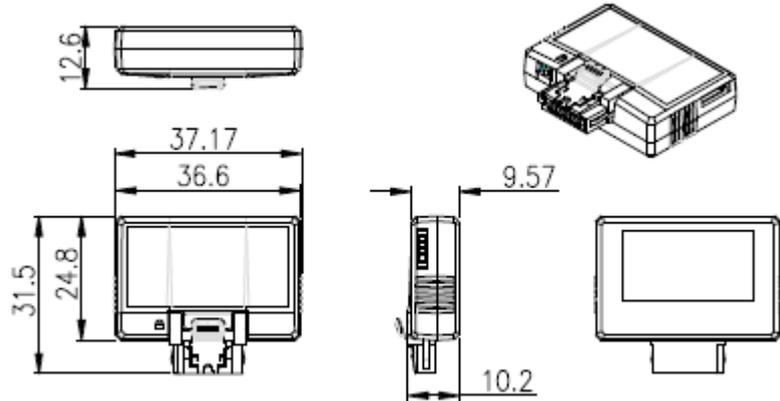

Dimension tolerance: $\pm 0.2\text{mm}$

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	32GB~256GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	520/ 180
Max. Power Consumption	2.39A (5V x 478mA)
Thermal Sensor	√
Extended DRAM buffer	√
H/W Write Protect	√
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	37.17 x 31.5 x 10.2 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
esusales@innodisk.com
+31-(0)40-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2016 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information

20161109

	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DGSML-32GD81BCBDC*	DGSML-64GD81BCBQC*	DGSML-A28D81BCBQC*	DGSML-B56D81BCBQC*
Industrial Grade (-40°C ~ +85°C)	DGSML-32GD81BWBDC*	DGSML-64GD81BWBQC*	DGSML-A28D81BWBQC*	DGSML-B56D81BWBQC*

* A: Pin8+ power cable / B: Pin8+ Pin 7

innodisk

www.innodisk.com